

PUMP SETTING CHART

$$\% \text{ Volume} = \frac{\text{Inoculant Rate (ml)}}{\text{ALPINE rate (L) x 1000 ml/L}} \times 100$$

ALPINE Rate/ac	IMP Gallons	3	3.5	4	4.5	5
	Litres	13.6	16	18	20.5	23
Inoculant Rate/ac		Pump Setting Required				
125	Litres	0.92%	0.78%	0.69%	0.61%	0.54%
150	ml	1.10%	0.94%	0.83%	0.73%	0.65%
175	ml	1.29%	1.09%	0.97%	0.85%	0.76%
200	ml	1.47%	1.25%	1.11%	0.98%	0.87%
225	ml	1.65%	1.41%	1.25%	1.10%	0.98%
250	ml	1.84%	1.56%	1.39%	1.22%	1.09%
300	ml	2.21%	1.88%	1.67%	1.46%	1.30%
500	ml	3.68%	3.13%	2.78%	2.44%	2.17%


MAX OPERATING - 85 PSI

Adjusting the injection rate (with pressure off)

IMPORTANT! Use no tools.

Adjustment must be made when there is no pressure in the DOSTRON.

- Turn off the water supply and allow the pressure to drop to zero.
- Unscrew the blocking ring (Fig. 13).
- Screw or unscrew the adjusting nut in order to line up the 2 peaks of the eyelet with the desired ratio on the scale (Fig. 14).
- Tighten the blocking ring (Fig. 15).

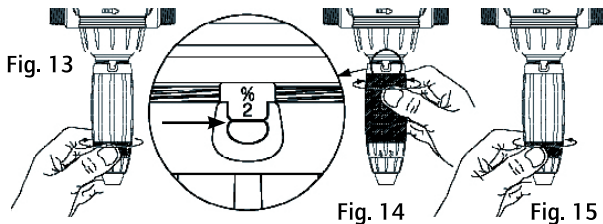

ALPINE Injection Kit • Model D16-15

Questions? Call 800-265-2268

www.alpinepfl.com